

# HIGH QUALITY FILTRATION WE MAKE MEDIA "ONE ROLL AT A TIME"

# **MULTI-WEDGE 95**

WITH SPOR-AX® ANTIMICROBIAL

MERV 14



# **WHY MULTI-WEDGE 95**

- **♦ WELDED HEAT SEALED POCKETS**
- **EXTENDED SERVICE LIFE**
- **♦ 100% SYNTHETIC MEDIA**
- **♦ NOT AFFECTED BY MOISTURE**
- ♦ U.L. CLASS 1
- **♦ SPOR-AX ANTIMICROBIAL**
- MERV 14
- ◆ 12", 15", 24", 30" DEPTHS

#### HIGH LOFT 3 LAYER MEDIA

Multi-Wedge 95 media acts as two filters in one. The yellow air entering media stops and retains larger particles. The center micro fine fiber media traps fine particulate.

96% effective on particles in the 1 to 3 micron range.

### **DURABILITY - SELF-SUPPORTING**

Pockets stay erect at any air flow.

Heat seal perimeter edges and internal dividers eliminate the concern of dust leakage.

Synthetic media is unaffected by moisture.

### NO MICROBIAL GROWTH ON THE FILTER

Spor-Ax is a proven, highly effective biocide that controls the growth of mold, mildew, algae and fungi on the media.

No premature filter failure from visible growth or an increase in resistance from mold in the media.

# **APPLICATIONS**

\*\* HOSPITALS

**☆** OFFICE COMPLEX

\*\* LABORATORIES

**★ FOOD PROCESSING** 

\* ELECTRONICS

\*\* PHARMACEUTICAL

\*CASINOS

\* MEDICAL BUILDINGS

"THE BEST FILTERS
COME FROM THE BEST MEDIA"


# TECHNICAL DATA

- MERV 14 ASHRAE 52.2-1999
- U.L. Class 1
- Operating temperature up to 200° F.
- Initial Resistance at 492 fpm for short depth series 0.50" 0.53"
- Initial Resistance at 492 fpm for extended depth series 0.40" 0.45"
- Recommended discard point 2.0" w.g.

#### **RESISTANCE VS AIRFLOW**

# 0.6 0.5 0.4 RESISTANCE (w.g.) 0.3 0.2 0.1 2000 500 1000 1500 MW 95 'H' - 15' MW 95 'H' - 12" MW 95 'H' - 30" MW 95 'H' - 24" AIR FLOW (CFM)

#### REMOVAL EFFICIENCY VS PARTICLE SIZE

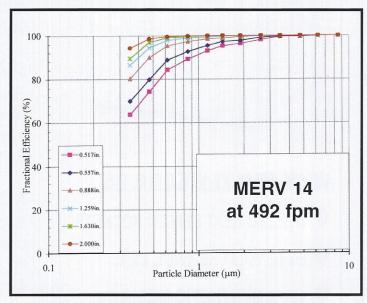


Particle Size Removal Efficiency Tested by LMS Technologies. Filter Size: 24 x 24 x 15 - 12 pocket

## **WELDED POCKET SEALS**

NO DIRT LEAKAGE NO NEEDLE HOLES

### **100% SYNTHETIC MEDIA**

PRE-FILTER MEDIA HIGH STRENGTH / DURABILITY UNAFFECTED BY MOISTURE



**MULTI-LAYER HIGH LOFT MEDIA** 

# SELF-SUPPORTING POCKETS

POCKETS STAY ERECT AT ANY AIRFLOW **ELIMINATES STRESS ON MEDIA** 

# SPOR-AX® ANTIMICROBIAL

CONTROLS MICROBIAL GROWTH ON MEDIA NO PREMATURE CHANGE OUT

Spor-Ax® is a registered trademark of Fiber Bond Corporation.

Fiber Bond Corporation 110 Menke Road Michigan City, IN 46360 Tel: (219) 879-4541 Fax: (219) 874-7502 www.fiberbond.net email: info@fiberbond.net Form # FB 07 2.5M 5/07