

HIGH QUALITY FILTRATION WE MAKE MEDIA "ONE ROLL AT A TIME"

DUSTLOK® GOLD MEDIA

WITH SPOR-AX® ANTIMICROBIAL

MERV 9

HIGHEST EFFICIENCY MEDIA MERV 9 REMOVES 90% 7-10 MICRONS



WHY DUSTLOK GOLD

- ♦ HIGHEST EFFICIENCY POLYESTER
- **DUSTLOK ADHESIVE**
- ♦ SPOR-AX® ANTIMICROBIAL
- **◆ MAXIMUM SERVICE LIFE**
- MERV 9

DUSTLOK GOLD SETS THE STANDARD

Dustlok Gold media, manufactured at Fiber Bond provides the highest level of filtration in a polyester media. MERV 9 with no electrostatic enhancement. Dustlok adhesive stops and retains small particulate. Dustlok adhesive re-activates throughout its service life.

Minimum efficiency 90% on 7 to 10 microns.

NO MOLD GROWTH ON THE MEDIA

Spor-Ax antimicrobial is a biocide that effectively controls growth of mold, mildew, algae and fungi on the media. Otherwise, mold growing in a filter media will increase resistance, reducing service life.

REDUCE MAINTENANCE/ENERGY COST

- > Keeps coils and fans clean.
- Maintain a cleaner work environment.
- Improved indoor air quality.

APPLICATIONS

Used in commercial and industrial air filtration systems. When clean air is important.


- * APARTMENTS
- ★ LIGHT INDUSTRY
- ** MALLS
- ★ OFFICE BUILDINGS
- ** BANKS
- * SCHOOLS
- ** RESTAURANTS
- * HOTELS

"THE BEST FILTERS
COME FROM THE BEST MEDIA"

TECHNICAL DATA

- MERV 9 ASHRAE 52.2-1999
- Operating temperature up to 200° F.
- Initial resistance 0.21" w.g. at 295 fpm.
- Initial resistance 0.45" w.g. at 492 fpm.
- Recommended discard point 1.0" w.g.


DUSTLOK GOLD MERV 9 SETS THE STANDARD

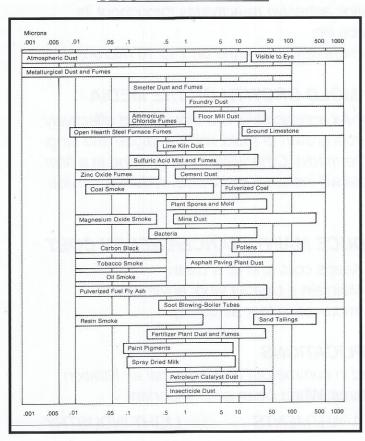

MINIMUM ASHRAE 52.2 PERFORMANCE

1 to 3 microns 39.8% 3 to 10 microns 85.4%

REMOVAL EFFICIENCY VS PARTICLE SIZE

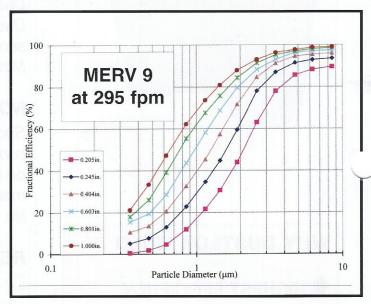

Particle Size Removal Efficiency Conducted by LMS Technologies. (January 2008)

MANUFACTURED ONLY AT FIBER BOND



Dustlok® and Spor-Ax® are registered trademarks of Fiber Bond Corporation.